


LEAF SPRING AXLES:

D-80 and T-80 axles are made of round 3-1/2" x 1/4" wall tubing. They have a "42" spindle and are available with 12" x 3-3/8" electric or hydraulic brakes. T-80 designates a straight axle. Specify D-80 where a 4" drop is needed. Both axles are available with oil or grease lubrication.



**2,000 -7,000# Specifications are the same as
Dexter Axles on pages A2 and A3**

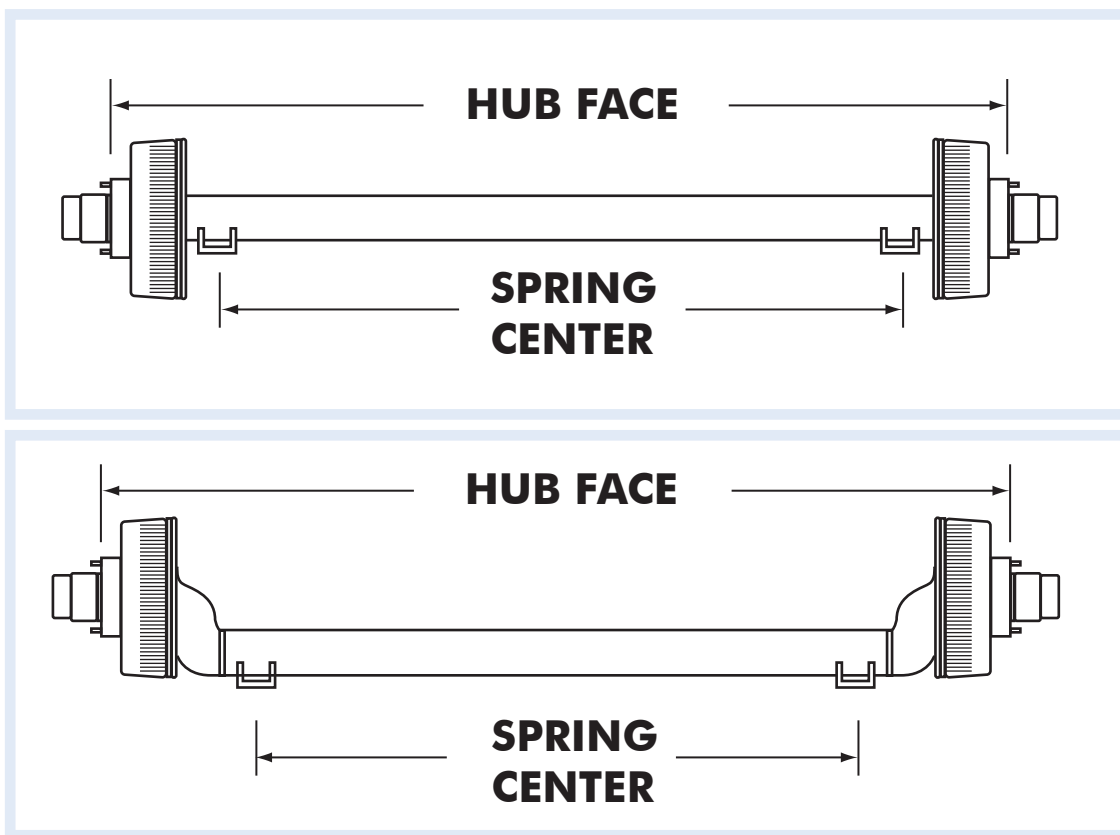

8,000# AL-KO D80 & T80 Leaf Spring Axles Assembly

Made to Order

Features and Options	
Tubing	3.5" x .25" wall tubing
Bearings	1-3/4" Inner & 1-1/4" Outer
Hub	8 on 6.5" Specify 7/16" studs (standard) or 5/8" studs (optional)
Brake	12" x 3-3/8" Electric 12" x 3-3/8" Hydraulic
Suspension	2" Wide Slipper Spring Hanger Kit
Lubrication	Grease, Ultra-Lube or Oil Bath

Axle Type	Overhang (Hub face - spring center)	
	Min.	Max.
Straight	17"	20"
4" Drop	18"	23.5"
Specifications		
<p>8,000 lbs Round Tube Axle: 3-1/2" diameter x .25" nominal wall thickness. Available in straight or 4" drop spindle.</p>		

Other axle configurations available on request

Information

Hubs
and Axles

Brake
Assemblies

Suspensions
& Fasteners

Tires &
Wheels

Couplers,
Jacks &
Winches

Hitches &
Towing
Accessories

Body
Components

Boat
Trailer Parts

Lights &
Electrical

Locks &
Cargo Control

Brake
Actuating
Systems

Switches